

### **120-277 Volt universal voltage. Linear LED Highbay**

#### **Product Specification**

##### **1.0 Product Feature**

- The main body of lamp is white paint, beautiful and easy installation
- Quick replacement metal halide high bay fixtures
- 105-130lm/w high lumen output saves more energy
- 100,000 hour L70 lifespan & 5 year warranty
- Input Voltage: AC100-277V, 50/60Hz, Adopt efficient constant current LED driver
- Operating temp: -4°F to 113°F
- Operating Humidity: 20% - 85% RH, non condensing
- No mercury or glass in LED prod. so no Universal Waste reg. or fines.
- Optional 0-10V dimming or non-dimming
- SUSPENSION MOUNTING



##### **2.0 Application**

Ideal for Big space area, Manufacturing, Warehouse, High Bay lighting, and so on

##### **3.0 Product Picture**




4.0 Product Size

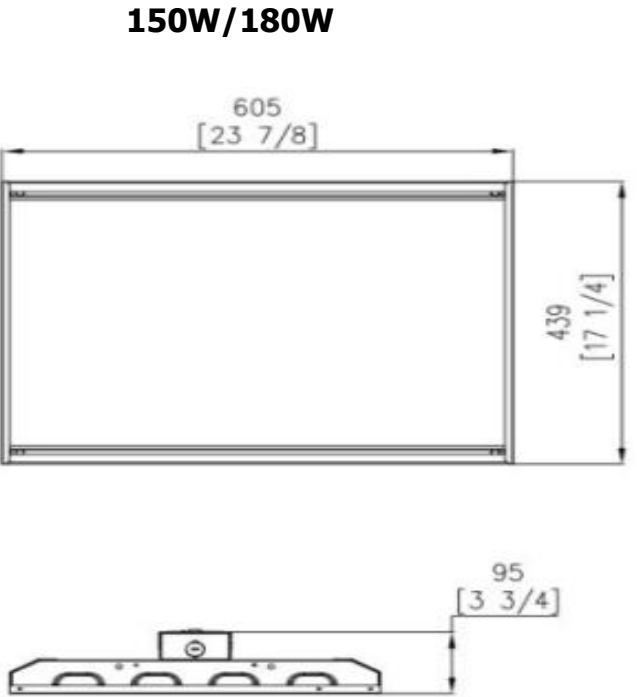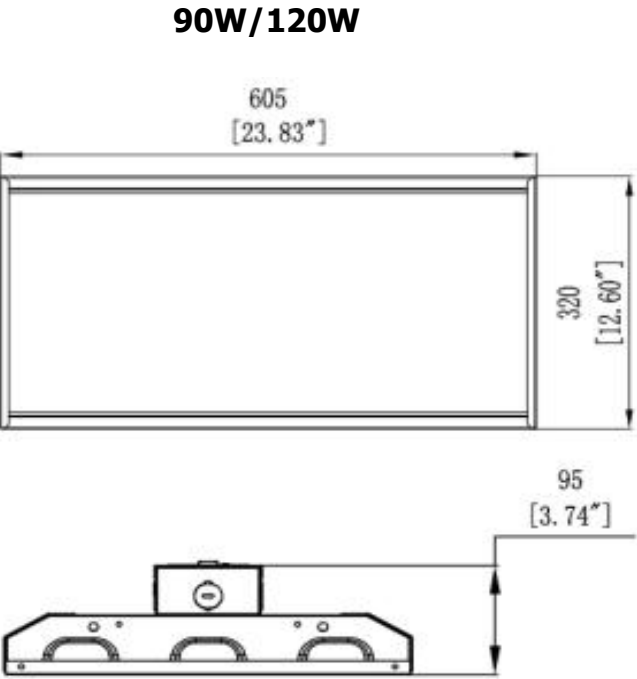

5.0 SPECIFICATIONS

Model No.	HB-120W-40K/50K	HB-180W-40K/50K
Wattage	120W	180W
Input Voltage	AC 100-277 V	AC 100-277 V
Power Factor	≥0.95	≥0.95
Lumens	15600LM	23400LM
Lumens Efficacy	130LM/W	130LM/W
CCT	4000K/5000K	4000K/5000K
CRI	>80	>80
Beam Angle	120°	120°
Environment	Indoor	Indoor
Certifications	UL, CUL, DLC	UL, CUL, DLC
Material Usage	RoHS compliant no mercury	

6.0 Packing & loading

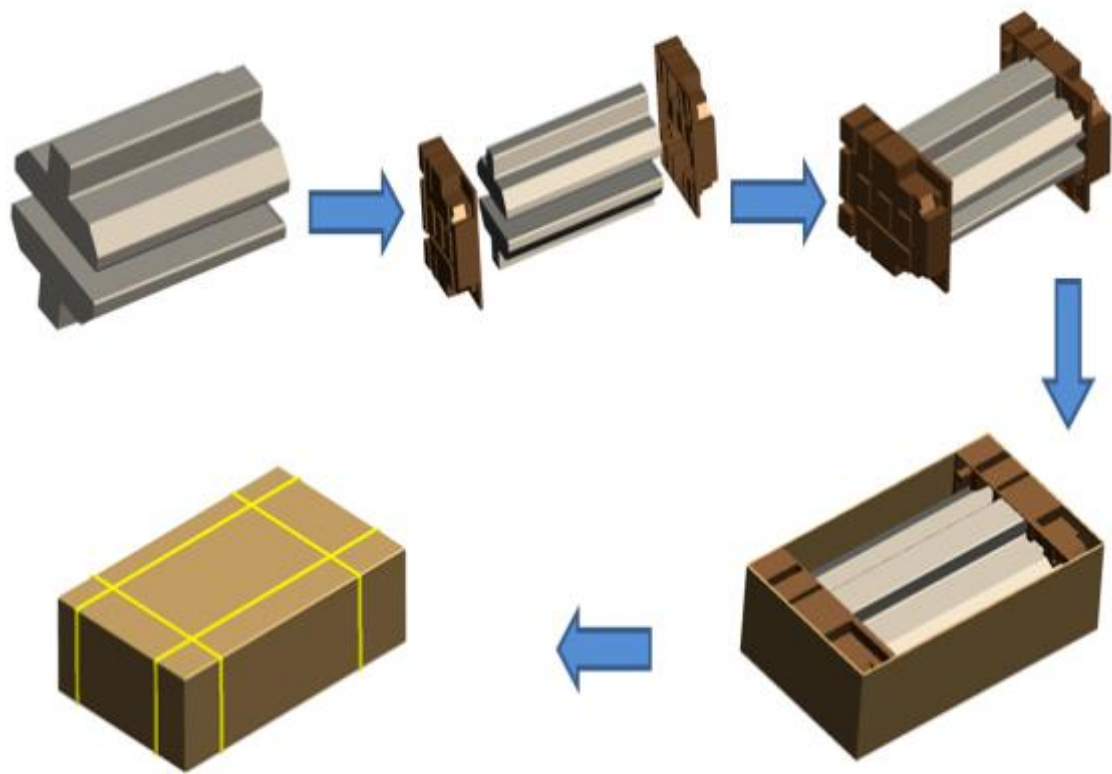

Wattage	HB-120W	HB-180W
PCS/CTN	2	2
G.W(kg )	11.6KG	15KG
CTN Size (L*W*H)	700*425*250	700*545*250

7.0 Note:

- Risk of fire. Turn of power before installation.
- Risk of electric shock. Make installation with gloves.
- These lamps are to be used in indoor damp location only. Do not suitable for wet location.
- If the lamp or luminaire exhibits undesirable operation (Buzzing, Flickering, etc), immediately turn off power,remove lamp from luminaire and contact manufacturer.
- Do not make mass installation before sample testing